


Bushings for Locating Pins - Shouldered, Standard

Standard

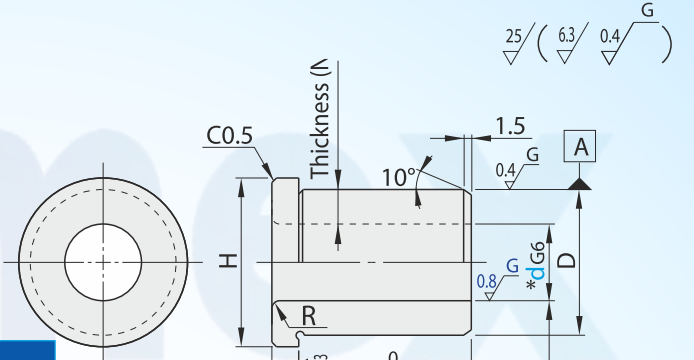

M Material	S Surface Treatment	M Hardness	Type	
			p6	m6
SKS3 Equivalent	—	60HRC~	DJBH	DJBHM
SKS3 Equivalent	Electroless Nickel Plating	60HRC~	DJBHN	DJBHMN
SUS440C or 13Cr stainless		50HRC~	DJBHC	DJBHMC

❶ Tolerance of d dimension 2 ~ 6 of electroless nickel plated products is H7.

❷ For hole machining, please note that inner diameter shrinkage of p6 Type is more than that of m6 Type.

Part Number					L Selection							Thickness (N)	R	H	T	D	D Tolerance		Compliance With Standard													
Type	d	d Tolerance		p6													m6	DJBH DJBHM	DJBHN DJBHMN	DJBHC DJBHMC												
		No Surface Treatment	Electroless Nickel Plating																													
(p6) DJBH DJBHN DJBHC (m6) DJBHM DJBHMN DJBHMC	2	G6	0.008	H7	+0.010 0	5	6	8	10	12	1.5	0.8	9	2.5	5	+0.020	+0.012	●	—	—												
			0.002													+0.012	+0.004															
	3	G6	0.008	H7	+0.010 0	5	6	8	*10	12	2	0.8	11	2.5	7	+0.024	+0.015	●	●	●												
			0.002							+0.015						+0.006																
	4	G6	0.012	H7	+0.012 0	*5	6	8	10	12	15	*16	20	2	1	12	3	8	+0.024	+0.015	●	●	●									
			0.004									+0.015	+0.006																			
	5	G6	0.012	H7	+0.012 0	5	6	8	10	12	15	16	20	2.5	1	14	3	10	+0.024	+0.015	●	●	●									
			0.004									+0.015	+0.006																			
	6	G6	0.012	H7	+0.012 0	5	6	8	10	12	15	16	20	25	2	1	14	3	10	+0.029	+0.018	●	●	●								
			0.004																								+0.018	+0.007				
	8	G6	0.014	G6	+0.014 +0.005																		2	2	16	4	12	+0.029	+0.018	●	●	●
			0.005																		+0.018	+0.007										
	10	G6	0.014	G6	+0.014 +0.005	6	8	10	12	15	16	20	25	2.5	2	19	4	15	+0.029	+0.018	●	●	●									
			0.005									+0.018	+0.007																			
12	G6	0.017	G6	+0.017 +0.006	8	10	12	15	16	20	25	30	3	2	22	4	18	+0.029	+0.018	●	●	●										
		0.006									+0.018	+0.007																				
13	G6	0.017	G6	+0.017 +0.006	10	12	15	16	20	25	30	4.5	2	26	5	22	+0.035	+0.021	●	●	—											
		0.006									+0.022						+0.008															
15	G6	0.017	G6	+0.017 +0.006	10	*12	*15	*16	*20	*25	*30	5	2	30	5	25	+0.035	+0.021	●	●	●											
		0.006									+0.022						+0.008															
16	G6	0.017	G6	+0.017 +0.006	10	12	15	16	20	25	30	5	2	30	5	26	+0.035	+0.021	●	●	●											
		0.006									+0.022						+0.008															
20	G6	0.02	G6	+0.020 +0.007	12	15	16	20	25	30	5	3	35	6	30	+0.035	+0.021	●	●	●												
		0.007														+0.022	+0.008															
25	G6	0.02	G6	+0.020 +0.007	16	20	25	*30	35	5	3	40	6	35	+0.042	+0.025	●	●	●													
		0.007														+0.026				+0.009												

[NG] L dimension with * is not applicable to DJBHC.

Basic Specifications

- Basic Shape : Flanged
- Environmentally Friendly : RoHS compliant (10 substances)
- I.D. Shape : Circular
- Type : Bushing

ORDERING GUIDE



— L

DJBH5

— 8

www.dymextech.com

india@dymextech.com