


Bushings for Locating Pins - Thin Wall



Thin Wall

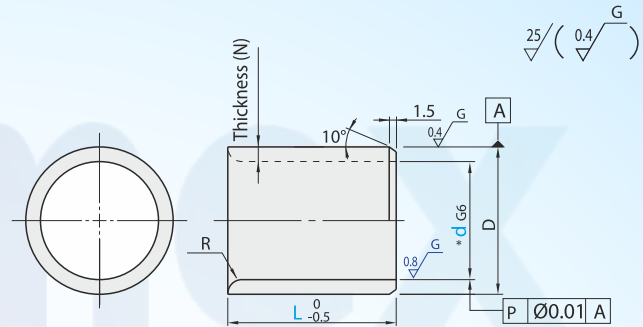

M	Material	S	Surface Treatment	H	Hardness	Type
	SUJ2 or SKS3 Equivalent				58HRC~	p6
	SUJ2 or SKS3 Equivalent		Electroless Nickel Plating		58HRC~	m6
	SUS440C or 13Cr stainless				50HRC~	

- Tolerance of d dimension 3 ~ 6 of electroless nickel plated products is H7
- For hole machining, please note that inner diameter shrinkage of p6 Type is more than that of m6 Type


Part Number						L Selection	Thickness (N)	R	D	D Tolerance	
Type	d	d Tolerance								p6	m6
		No Surface Treatment		Electroless Nickel Plating							
p6) DJBAUP DJBAUNP DJBAUCP (m6) DJBAU DJBAUN DJBAUC	3	G6	+0.008 +0.002	H7	+0.010 0	5 6 8 10 12	1	0.5	5	+0.020 +0.012	+0.012 +0.004
	4	G6	+0.012 +0.004	H7	+0.012 0	5 6 8 10 12 15 16	1	0.5	6	+0.020 +0.012	+0.012 +0.004
	5	G6	+0.012 +0.004	H7	+0.012 0	5 6 8 10 12 15 16 20	1	0.5	7	+0.024 +0.015	+0.015 +0.006
	6	G6	+0.012 +0.004	H7	+0.012 0		1	0.5	8	+0.024 +0.015	+0.015 +0.006
	8	G6	+0.014 +0.005	G6	+0.014 +0.005	6 8 10 12 15 16 20	1	0.5	10	+0.024 +0.015	+0.015 +0.006
	10	G6	+0.014 +0.005	G6	+0.014 +0.005		1.5	0.5	13	+0.029 +0.018	+0.018 +0.007
	12	G6	+0.017 +0.006	G6	+0.017 +0.006	8 10 12 15 16 20	1.5	0.5	15	+0.029 +0.018	+0.018 +0.007
	13	G6	+0.017 +0.006	G6	+0.017 +0.006	10 12 *15 16 20	2	1	17	+0.029 +0.018	+0.018 +0.007
	15	G6	+0.017 +0.006	G6	+0.017 +0.006	10 12 15 16 20	2	1	19	+0.035 +0.022	+0.021 +0.008
	16	G6	+0.017 +0.006	G6	+0.017 +0.006	10 12 15 16 20 25	2.5	2	21	+0.035 +0.022	+0.021 +0.008
	20	G6	+0.020 +0.007	G6	+0.020 +0.007	12 15 16 20 25	3	2	26	+0.035 +0.022	+0.021 +0.008
	25	G6	+0.020 +0.007	G6	+0.020 +0.007	20 25	3	2	31	+0.042 +0.026	+0.025 +0.009

- NG JL dimension with * is not applicable to DJBAUN.

Basic Specifications

- Basic Shape : Straight
- I.D. Shape : Circular
- Type : Bushing

Example



Bushings for Locating Pins - Thin Wall

ORDERING GUIDE



DJBAU6-12

www.dymextech.com
india@dymextech.com