

Shaft Collar - Compact with Urethane, Clamp Type / Compact with Urethane, Split Type



- Features:** Standard with Urethane: Reduces noises generated by metal-to-metal contact.
Compact with Urethane: Smaller by up to 44% in width (B dimension) and 25% in O.D. (D1 dimension) than Standard Type with Urethane


Standard with Urethane, Clamp Type



Standard with Urethane, Split Type



Type		M	Material	S	Surface Treatment	A	Accessory
Clamp	Split						
DSCD	DSCSPD		S45C Equivalent		Black Oxide Coating		Clamp: Hex Socket Head Cap Screw 1 pc. Split: Hex Socket Head Cap Screw 2 pcs. M SCM435 Equivalent
DPSCD	DPSCSPD						PSCD PSCSPD Electroless Nickel Plating Clamp: Hex Socket Head Cap Screw 1 pc. (SUS) Split: Hex Socket Head Cap Screw 2 pcs. (SUS) M SCM435 Equivalent
DSSCD	DSSCSPD		SUS304		—		

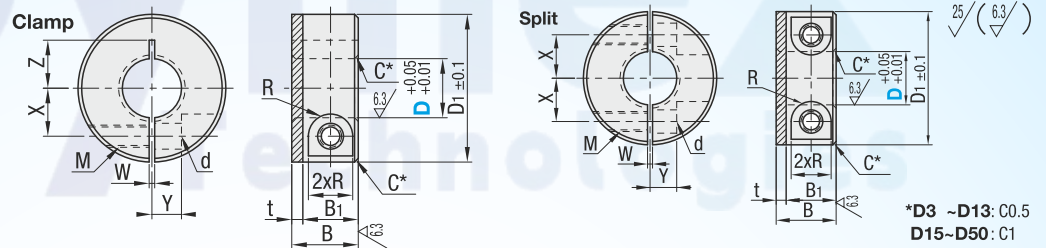

D dimension tolerance of SCD ranges from +0.01 to +0.08

Part Number		B	D1	B1	t	M (Coarse)	d	R	W	X	Y	Z
Type	D											
(Clamp) DSCD DPSCD DSSCD * marked dimensions are for Clamp Type only. (Split) DSCSPD DPSCSPD DSSCSPD	*3	10	15	8	2	M3	3.4	3	1.0	4.5	3	3~5
	*4											3.5~6
	*5											6~7
	6	12	20	10	3	M4	4.5	3.75	1.5	6	4	6~6.5
	8											7~10
	10											8~12.5
	12	12	35		3	M6	7	6	1.5	11	6	9~12.5
	13											10~12.5
	15											11~13
	16	20	40		5	M8	9	9	2.0	13	8	11~13
	20											13~15
	25											16~18
	30	23	55	18	5	M8	9	9	2.0	15	10	15~20
	*35											17.5~21
	*40											20~23
	*50	27	85	22		M10	11	11		32	16	25~28

- Basic Specifications**
 - Fastening Method - Split
 - Specifications - Urethane
 - Side Milling - Not Provided

ORDERING GUIDE



DSCSPD8

www.dymextech.com
india@dymextech.com