


Shaft Supports Flanged Slit, Reinforced

DC-SHFMQ16



Dimensional Drawing of Shaft Supports

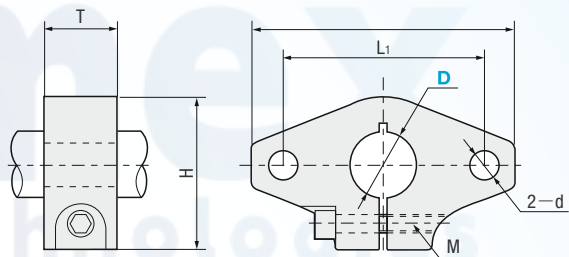

Specifications Overview of Shaft Supports

Type of Shaft Supports	M Material	S Surface Treatment	A Accessories
Type of Shaft Supports	Aluminum	Clear Anodized	1 hexagon socket head bolt


Precautions of Shaft Supports

1. Dimension tolerance is ± 0.5 where not indicated.
2. After the mounting hole D is machined according to the tolerance of 0 to +0.05, the opening is machined. The tolerance of the hole after machining will be changed.
3. Minimum order quantity of Shaft Supports: 4pcs

Dimension Specification Table of Shaft Supports

Part Number		L	T	L ₁	H	Supplied Bolt M
Type	D					
DC-SHFMQ	10	43	10	32	24	M4
	12	47	13	36	28	
	16	50	16	40	31	
	20	60	20	48	37.5	M5
	25	70	25	56	42.5	
	30	80	30	64	30	M6

Example

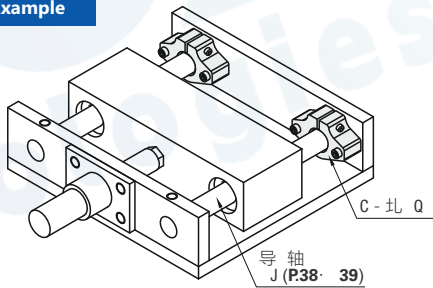

Basic Specifications

- **Shape** - Flanged Type
- **Surface Treatment** - Clear Anodize
- **Thickness** - Standard
- **Flange Shape** - Diamond Flange
- **Mounting Hole Type** - Through-hole type
- **Shaft Securing Method** - Slit
- **Type** - Machined Product
- **Dowel Hole** - N/A
- **Mounting Hole Type** - Through-hole
- **Material** - Aluminum Alloy
- **Flange Shape/Type** - Standard
- **Clamp Lever** - N/A
- **Flange Shape** - TDiamond-shaped flange

ORDERING GUIDE



— (Type-D)

DC-SHFMQ16