Draw Latch

Draw Latches

DPKWS1

M Material	S Surface Treatment
SUS304	Tumble Polish

Part Name		* Pull Force N (kgf)	Mass (g)
Type	No.		
DPKWS	1	49(5)	11
	2	78(8)	12
	3	98(10)	18
	4	147(15)	37

* Pull force is the reference value for 1mm pull distance

Example

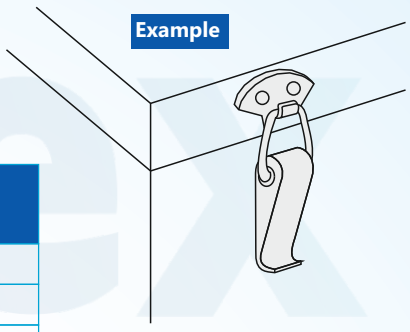

DPKWS1 (Stainless Steel)

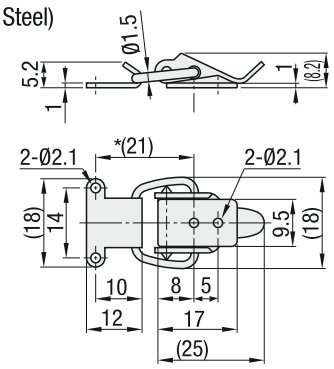

<Recommended Mounting Hole Pitch>



Recommended screws:
Cross Recessed Pan Head Screws M2.0

DPKWS2 (Stainless Steel)

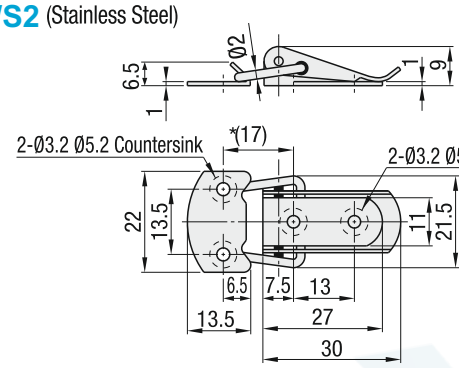

<Recommended Mounting Hole Pitch>



Recommended screws:
Cross Recessed Flat Head
Machine Screws M2.5

DPKWS3 (Stainless Steel)

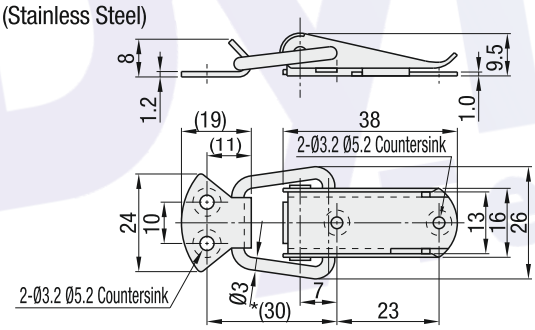

<Recommended Mounting Hole Pitch>

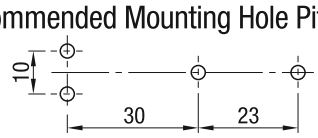

Recommended screws:
Cross Recessed Flat Head
Machine Screws M2.5

DPKWS4 (Stainless Steel)

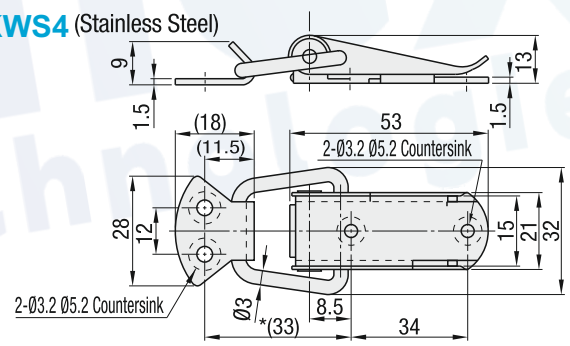

<Recommended Mounting Hole Pitch>

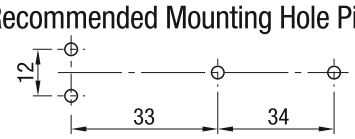

Recommended screws:
Cross Recessed Flat Head
Machine Screws M2.5

* The dimensions are for 0mm pull distance. (Recommended mounting dimension)

Basic Specifications

- **Type -** Draw Latches